


4in1 マルチ充電ケーブル内蔵型  
ワイヤレスモバイルバッテリー

User Manual

取扱説明書

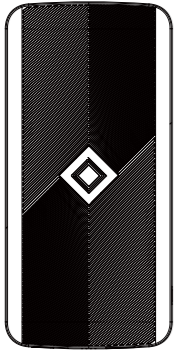

お買い上げいただきありがとうございます。  
本製品は、あなたのデジタルライフをより楽しくする  
ワイヤレス対応モバイルバッテリーです。



安全上のご注意

使用上のご注意  
ご購入後、初めてお使いになる前には必ず  
「初期充電」として一度満充電にしてください。  
※使用前・使用後は必ず充電してください。


本製品をお使いになる前に、この製品説明書をよくお読みください。  
不適切な使用や非対応の携帯端末での使用は、  
本製品の機能低下・携帯端末の破損の原因となります。

01. 携帯機器の入力電圧が本製品に対応しているかご確認ください
02. 本製品に金属を差し込まないでください。ショートの原因となります。
03. -10℃～40℃の環境下で保存し、直射日光にさらさないでください。
04. 分解・改造はおやめください。
05. 火災・爆発のリスクを避けるため、火の近くや高温の環境での使用はおやめください。
06. 高温、多湿な環境に放置しないでください。
07. お子様やペットの手の届く範囲に置かないでください。
08. 本製品から漏れた液体が目に入った場合、肌や服についた場合は、すぐに清潔な水で洗ってください。
09. 本製品は充電中にわずかに発熱しますが、故障ではありません。
10. 本製品を充電する際は 5V/2A の電源アダプタをご使用ください。  
PC を使った充電では、満充電までにより長い時間がかかります。
11. 異常を感じたらすぐに使用を中止し、カスタマーサポートまでご連絡ください。
12. 干渉を防ぐため、ペースメーカーや補聴器などの医療機器からは  
20cm 以上離してお使いください。
13. 付属のケーブルを強くひっぱったり、折り曲げたりしないでください。



- ・本製品はすべての環境でご使用いただけることを保証するものではありません。
- ・厚みのあるスマホケースと兼用される場合、ワイヤレスでの充電されないことが  
ございますので、ご確認の上ご使用ください。
- ・お客様のご使用状況、環境などにより変形や変色をする場合があります。
- ・磁気カードや IC カードを近づけないでください。

※ 本書に記載されているイラストは製品と異なる場合があります。


構成品

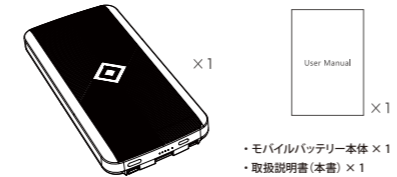

各部名称

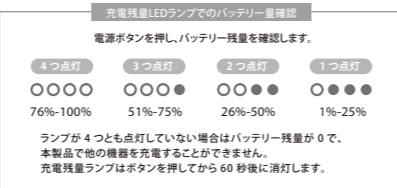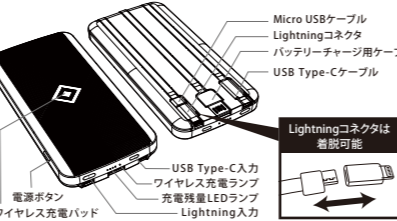


本体をチャージする

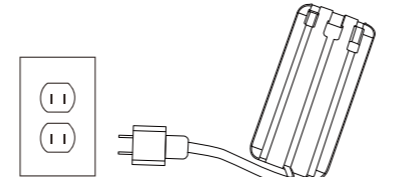

バッテリーチャージ用ケーブルを使用して本製品をチャージしてください。  
USB Type-C、Lightning ケーブルをそれぞれの入力端子に接続しての  
チャージも可能です。  
※ACアダプターは付属しておりません。


携帯端末を充電する

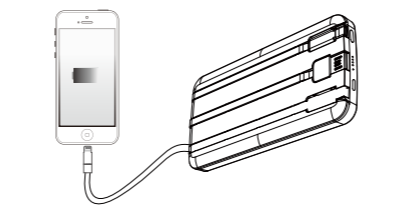

※お使いの携帯端末が本製品の充電電圧に対応しているかご確認ください

1. 携帯端末と本製品を接続します。
2. 電源ボタンを押し、充電を開始します。  
バッテリー残量ランプが本製品内のバッテリー残量を表示します。
3. 携帯端末が満充電されたら、接続を取り外してください。

ワイヤレス充電・2 台同時充電

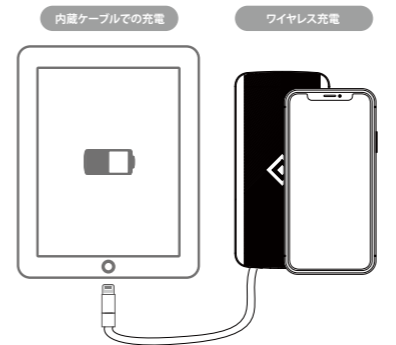

本製品の電源を入れ、ワイヤレス充電対応携帯端末をワイヤレス充電パッド  
に置きます。  
充電が開始されるとワイヤレス充電ランプが青く点灯します。

ワイヤレス充電パッドから携帯端末を取り除くと、ワイヤレス充電ランプは消  
灯し 60 秒後に自動的にスタンバイモードへと切り替わります。

ワイヤレス充電の最中でも内蔵ケーブルで他の機器を同時に充電することが  
可能です。

製品仕様

バッテリー容量	8,000mAh (3.7V/29.6Wh)
バッテリータイプ	リチウムポリマー
DC 入力	5V / 2.0A (MAX)
DC 出力	5V / 2.4A
ワイヤレス出力	5W
サイズ	H157×W75×D16mm
重量	220 g
バッテリー満充電 所要時間	5V / 2A での充電時：約 5 時間 5V / 1A での充電時：約 9 ～ 10 時間

トラブルシューティング

長期間放置していたら電源が入らなくなった

本製品を長期間使用していない場合、使用していない期間にも徐々に放電  
されるため、充電がなくなります。  
2,3 分の充電後、通常通り使用可能となります。  
本製品の機能を最適に保つには、ご使用にならない場合でも 3 ヶ月に 1 度  
充電をしてください。

充電時に本体が発熱する

本製品をチャージする際や本製品を使って携帯端末を充電する際、発熱  
がありますが、電力消費の際に通常発生する現象であり、故障等では  
ありません。  
過充電防止回路によりオーバーヒートを防いでおりますので、安心して  
お使いください。

保証書

購入年月日	
購入店舗	
購入金額	
保証期間	製品ご購入から1年間
お客様情報	お名前
	ご住所
	連絡先

※保証書内の所定欄に記入して大切に保管してください。  
※製品の故障が発生した場合は、販売店もしくはカスタマーセンターにご連絡ください。  
※本説明書の内容及び製品のデザインについては、よりよい品質のために事前予告  
なしに変更することがあります。

■免責事項

- ※製品の保証に関しましては日本国内のみ有効となります。
- ※保証書の購入年月日、購入店舗、お客様情報（お名前、ご住所）が記載されていない  
場合、記入内容を任意に修正した場合、保証書を紛失された場合には保証の対象外に  
なります。予めご了承ください。
- ※使用上の誤り、または改造、不当な修理による故障は対象外となります。
- ※火災、地震、水害、落雷、その他の天災、公害等による故障は対象外となります。
- ※注意・警告事項に該当する操作、使用方法等による故障や損傷または身体に及ぶ  
障害等は対象外となります。
- ※初期不良でない故障や損失、紛失に関しては保証対象外となります。
- ※充電電池の消耗に関しては保証対象外となります。

販売元：株式会社ロア・インターナショナル  
カスタマーセンター：support@roa-international.com




Safety precautions

Please read the following carefully before using this product  
Incorrect use or incompatibility with device may result in reduced  
battery performance or damage to your device.

01. Check device voltage for compatibility with this product.
02. Do not insert any metallic object into the product. This may cause  
the unit to short out.
03. Keep product out of direct sunlight (storage temperature:  
-10℃～40℃)
04. Do not disassemble or mishandle product.
05. Do not place product near fire or high-temperature environments,  
to avoid risk of fire or explosions.
06. Avoid leaving product in a humid environment.
07. Keep product out of reach of children and pets.
08. When liquid from product splashes into eyes, do not rub. Rinse  
eyes with clean water and seek medical treatment when it is  
necessary.
09. Once electrolyte splashes to skin or cloth, wash with clean water  
immediately.
10. Product will heat up slightly when charging and discharging.
11. Please use 5V/2.0A Adapter to charge the product. It will take  
a longer time to charge the product through computer.
12. Marked capacity is based on internal 3.7 V standard battery.
13. In case of abnormalities during usage, stop using the product  
immediately and contact our service department.

※ Thank you for using this digital product of our company. In order to  
let you experience the product swimmingly, detailed instruction is  
provided which you can find the product's introduction, usage and  
other information. Before using this product, please read the manual  
carefully, so that you can correctly use it. In case of any printing or  
translation error, we apologize for the inconvenience. As for the  
content change, we are sorry for no further notice.

Ports and Controls

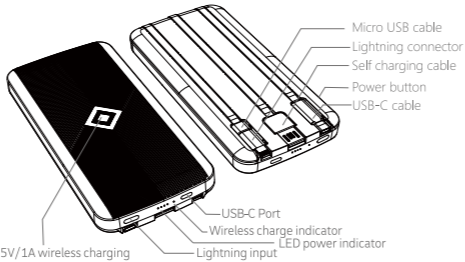


Press the button to see the battery power.  
The relationship between discharging indicators and battery  
power:

- 1) Four lights stay on: power 76%-100%
- 2) Three lights stay on: power 51%-75%
- 3) Two lights stay on: power 26%-50%
- 4) One light stays on: power 1%-25%

Four lights off, power=0. At this point, this product is unable to  
charge any devices. Power indicator will be off after 60 seconds,  
press the power button to see the remaining battery.


Operation instructions

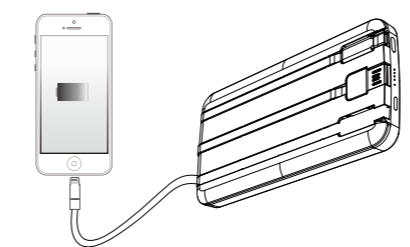

Be sure the charging voltage of your device is compatible with it.


1. Connect this product with digital devices via correct ports.
2. Press the power button to start charging. The LED power indicator will  
show the remaining power.
3. Please disconnect after devices are fully charged.

Charging

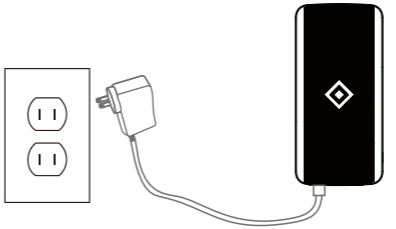

Charge it by USB-C\Lightning adapter or by connecting with  
computer via USB-C\Lightning cable.  
(Please charge this product with a qualified adapter. Due to different  
charging methods and charging environments, the time needed for  
charging may vary.)  
Charge this product with Self charging cable.

Charge simultaneously.

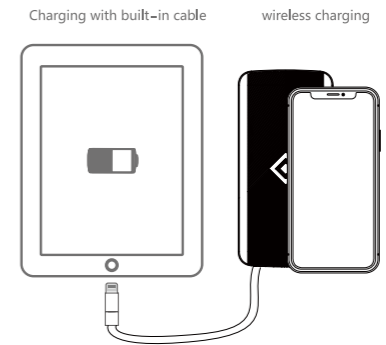

When this product is turned on, please place a mobile  
phone which functions wireless charging (e.g. iPhone 8,  
iPhone X, Samsung S8) on the wireless charging pad.  
When the blue indicator lights up, the charging begins.

The indicator will light out after the mobile phone is  
removed, this product will turn into standby mode and  
automatically turn off in 60 seconds.

When this product begin wireless charging, this product can  
charge the another device by built-in cable.

Specifications

Capacity	8000mAh(3.7V/29.6Wh)
DC-IN	5V/2.0A
DC-OUT	5V/2.4A
Wireless Charge emission	5W
Size	H157×W75×D16mm
Weight	220g

Troubleshooting

1. This product will not power on if unused for an extended period of time.  
When this product is left unused for an extended duration,  
it will discharge gradually until no power remains. Product will  
work normally after 2-3 minutes of charging. We suggest to  
charge the product every 3 months to maintain its best functionality.
2. This product heats up during charge and discharge cycles. This is a  
common occurrence, due to power consumption, and will not affect  
products not affect products functionality. The product will not  
overheat due to its built-in overcharge protection circuitry.